

**Design of experiment approach for stress assessment in saddle supported
pressure vessels**Hirenkumar I Joshi¹, Ghanshyam D Acharya²¹Kadi Sarva Vishvavidyalaya, Gandhinagar and Dept. of Mech. Engineering, Government Engineering College, Rajkot.
²Principal, Atmiya Institute of Technology & Science, Rajkot

Abstract —Horizontal pressure vessels supported with the saddles are subjected to high stresses near saddle vessel interface area. An accurate analysis of the local stresses and displacements of the vessels is thus of great importance. This paper aims to carry out the study of effect of design parameters in the stress distribution in vessel for saddle supported pressure vessel with industrial problem. The finite element analysis has been carried out in ANSYS 15.0 at actual loading condition of vessel and mesh convergence has been achieved. The design of experiment has been carried out by Taguchi method. L25 orthogonal array has been designed to carry out experimentation. Total 5 factors namely wear plate width, saddle width, distance of saddle from head, saddle wrap angle and wear plate extension have been selected for the Taguchi experimentation. Further simulation has been carried out in ANSYS 15.0 for Taguchi experimentation. Main effect plots and Regression equations have been obtained. The suggested model can be used for predicting the values of stress and the effect of parameters on the stress distributions.

Keywords-saddle supported vessels, Finite Element Analysis, Taguchi experimental design, L25 orthogonal Array, Regression Equation

I. INTRODUCTION

The horizontal pressure vessels are supported on saddles. Most of the pressure vessels are used in chemical industries. As the pressure vessels are always under severe loading conditions due to pressure, forces, moments, temperature in addition to exposure to chemical reactions. It is mandatory to design the Pressure vessel in compliance with the various codes. ASME code is predominantly used for design and fabrication of pressure vessel. As the code is very strict due to the safety aspects in general the design obtained by codes are not cost effective. In the present era of global competitions it is desirable that the designer should also look to reduce the factor of safety. The designer are required to apply latest design and analysis packages to maintain the safety along with reduction in cost. FEA and Design of Experiments can be effectively used to design a product along with consideration to safety and cost aspects. In horizontal saddle supported large pressure vessel the saddle horn area and the supports are having high stress values due to the membrane and bending stresses. The ASME CODE [3] does not give any guidelines for design of saddles. The saddles are designed empirically in accordance with the procedure given by Zick[11].

A precise study of the membrane and bending stresses and deformations of the vessel and saddle is critical and has obtained the attention to researchers. Ong [2] studied the horizontal storage vessel for circumferential stress for various configurations. Nash et al. [10] investigated the plastic collapse of horizontal saddle supported storage vessels along with parametric study. FEM has been applied effectively for finding stress distribution in saddle supported pressure vessel along with effect of individual parameters by Shafique M.A.Khan [13]. Parametric analysis for horizontal vessel was performed by Finite element method and further results were compared with experimentation on small scale model by L.yang et al. [7]. Widera et al. [1] and K.Magnucki et al. [8] also performed study of horizontal pressure vessel for different range of various parameters with the help of finite element method.

With a consideration of above literature reviews that saddle supports have not been studied in great detail. This research aims to study the effect of various design parameters in the stress distribution in vessel for saddle supported pressure vessel with industrial problem. The case study of industrial pressure vessel has been taken and CAD model has been created with real geometry of pressure vessel. The model has been simulated with actual boundary conditions and finite element method has been applied in ANSYS 15.0 to analyze the effect of various parameters on the stress distributions in the pressure vessel. Taguchi method has been applied for design of experiment and regression equations have been developed for stress in the horn area.

II. PROBLEM SETUP**2.1 Design Data**

The case study has been taken with MetalFab Engineers Surat. The vessel has been designed as per code ASME SECTION VIII DIV. 1 [3] and following dimensions are obtained.

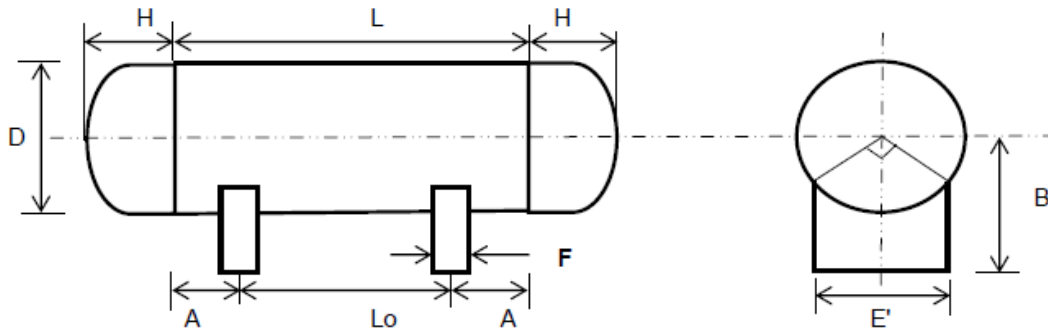


Figure 1. Vessel Geometry

Table 1. Vessel and Saddle Design Data

1	Vessel Design pressure	P	6.3 Kg/cm ²	Centre height of Vessel	B	2000
2	Joint Efficiency (Full X ray)	E	1	Included Angle of Saddle	2 θ	140
3	Vessel Diameter OD	D	3024 mm	Saddle width	E'	2850
4	Length of Vessel (Tan to Tan)	L	8000 mm	Saddle Breadth	F	300
5	Dished End height H	H	762 mm	Wear/Pad Plate thickness	tw	16
6	CC distance between saddle	Lo	6600 mm	Density of medium to be stored	ρ	985 kg/cm ²
7	Max. Overhang of Vessel from Saddle	X	1462 mm	Vessel Tangent line from Saddle	A	700
8	Shell Thickness	ts	12	Weight of Vessel	W	12200 kg
9	Dished End Thickness	te	12	Content weight	Wt	53264 kg
10	Volumetric Capacity of Vessel	V	63.62	Operating weight	Wo	65464 kg

2.2 Finite element analysis

The geometry has been created in Creo parametric and further exported to ANSYS 15.0 for finite element analysis. The element type selected for the FEA is 8 node brick elements for ANSYS Library. The vessel has been applied boundary condition as shown in figure 4 as per the design data by applying internal and hydrostatic pressure. Both the saddles have been considered as fixed support. The weight of vessel is considered also for the analysis purpose.

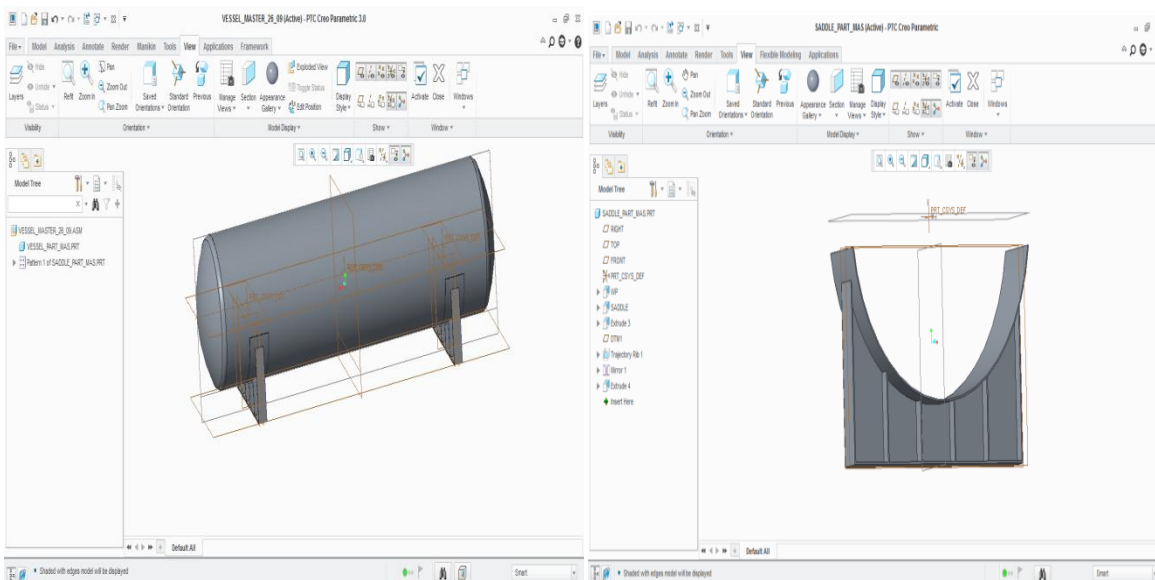


Figure 2. CAD Model of Vessel with saddle

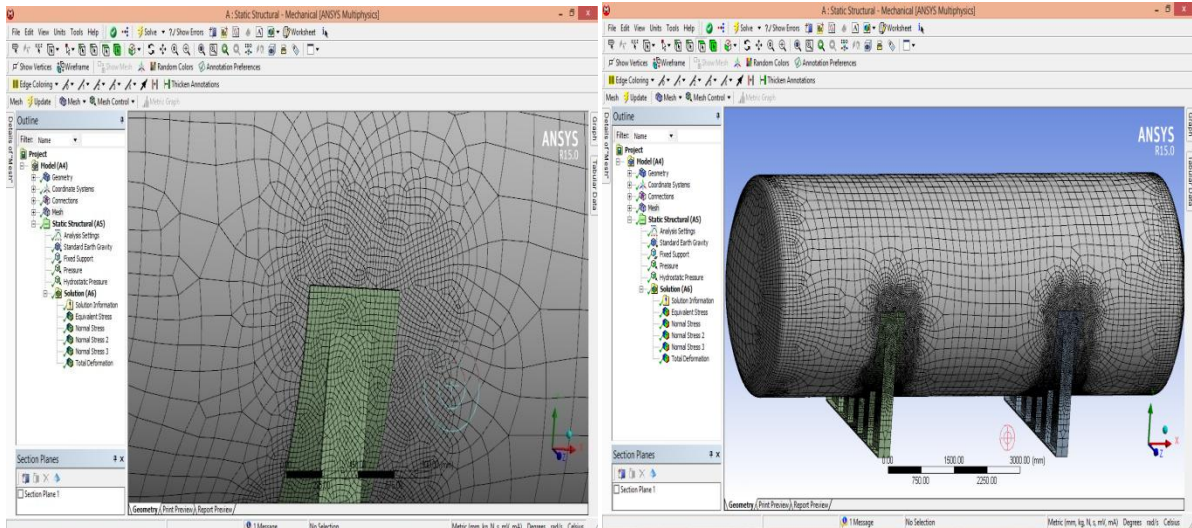


Figure 3. Meshing

The vessel has been simulated as shown in figure 4 for the boundary condition of internal pressure of 0.6178 Mpa and hydrostatic pressure of the fluid along with the self weight of the vessel. Further mesh convergence has been done before achieving the element size for all the simulation as shown in the figure 3. The solver converges to a less than 5 % error for all the solutions so the results are reliable from prediction point of view.

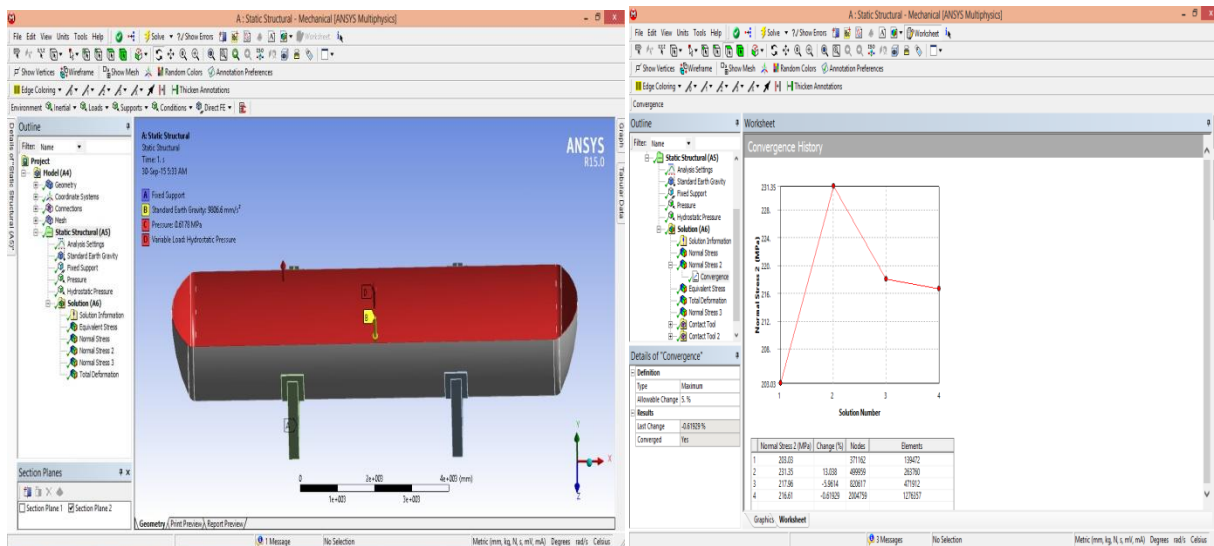


Figure 4. Boundary conditions and Convergence

III. DESIGN OF EXPERIMENTATION

Various mathematical modeling techniques are available to find the response of various parameters. Design of Experiments is a versatile method for mathematical modeling. The classical methods are difficult to handle in addition to complex in nature. In classical method large numbers of experiments are required to be performed. To counter these difficulties, the Taguchi method uses a special design of orthogonal arrays to study the entire parameter space with only a small number of experiments. The TAGUCHI method has been for finding the influence of and its significance. To carry out Designing following parameters were considered as discussed previous with its range as mentioned in table.

3.1. Factors

The factors as shown in table 2 have been shortlisted to evaluate the effect and the range has been selected from the references Ong [2], tooth [6], Abbasi [9], Nash [10] and in consultation with industry experts so as to make the study more effective.

Table 2. Design parameters

Sr	Parameter		Min Value	Max Value
1	Saddle angle(degree)	Θ	120	180
2	Extension of wear plate(degree)	ϕ	6	20
3	Distance of saddle from head(mm)	a	350 mm	2000 mm
4	Wear plate width(mm)	w	300 mm	700 mm
5	Saddle width(mm)	b	150 mm	400 mm

3.2. Experimental Design

As per Taguchi method the following L25 orthogonal array has been designed to carry out experimentation.

Table 3. Taguchi L25 orthogonal array with results

Exp. No.	Saddle angle(degree)	Extension of wear plate(degree)	Dist of saddle from head	Wear plate width	Saddle width	Response 1 (s1 Mpa) on vessel near wear plate	Response 2 (s2 - Mpa) on vessel at midspan
1	130	6	600	300	160	92.9	37.51
2	130	9	900	400	220	99.2	35.03
3	130	12	1200	500	280	148.14	32.699
4	130	15	1500	600	340	120.7	30.818
5	130	18	1800	700	400	175.52	30.557
6	140	6	900	500	340	114.35	34.415
7	140	9	1200	600	400	128.38	32.117
8	140	12	1500	700	160	117.72	33.877
9	140	15	1800	300	220	141.36	32.93
10	140	18	600	400	280	123.38	36.507
11	150	6	1200	700	220	129.9	35.147
12	150	9	1500	300	280	135.71	34.327
13	150	12	1800	400	340	120.49	32.577
14	150	15	600	500	400	159.64	33.745
15	150	18	900	600	160	133.2	36.561
16	160	6	1500	400	400	118.19	32.367
17	160	9	1800	500	160	129.75	34.631
18	160	12	600	600	220	140.74	37.679
19	160	15	900	700	280	113.61	35.471
20	160	18	1200	300	340	125.91	35.214
21	170	6	1800	600	280	126.11	32.794
22	170	9	600	700	340	134.84	35.083
23	170	12	900	300	400	123.21	35.651
24	170	15	1200	400	160	123.74	36.842
25	170	18	1500	500	220	131.74	34.836

IV. RESULTS AND DISCUSSIONS

The main effect plots and analysis of variance are obtained as in figure 5 and the table 4. The R-Sq value of the model is 79.87 % which implies that model is significant. Further the regression equation is obtained as follows.

Response 1(stress 1) = 61.3 + 0.019 Saddle angle(degree) + 1.65 Extension of wear plate(degree) + 0.00826 Dist of saddle from head + 0.0338 Wear plate width+ 0.0629 Saddle width

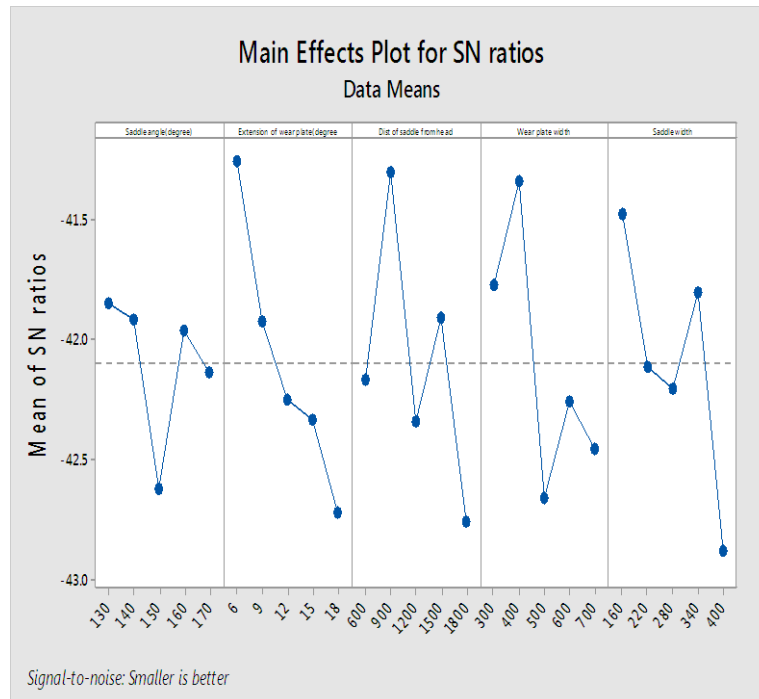


Figure 5. Main effect plot for stress 1.

Table 4. ANNOVA for Stress 1.

Source	DF	Adj SS	Adj MS	F-Value	P-Value
Saddle angle(degree)	4	1.947	0.4867	0.31	0.860
Extension of wear plate(degree)	4	6.042	1.5104	0.96	0.517
Dist of saddle from head	4	5.845	1.4612	0.92	0.529
Wear plate width	4	5.800	1.4499	0.92	0.532
Saddle width	4	5.458	1.3645	0.86	0.555

The main effect plots and analysis of variance for Response 2 (stress at vessel midspan) are obtained as in figure 6 and the table 5. The R-Sq value of the model is 97.82 % which implies that model is significant. The regression equation is obtained as follows.

$$\text{Response 2(stress2)} = 35.8 + 0.0459 \text{ Saddle angle (degree)} + 0.0117 \text{ Extension of wear plate (degree)} - 0.00298 \text{ Dist of saddle from head} - 0.00282 \text{ Wear plate width} - 0.0124 \text{ Saddle width}$$

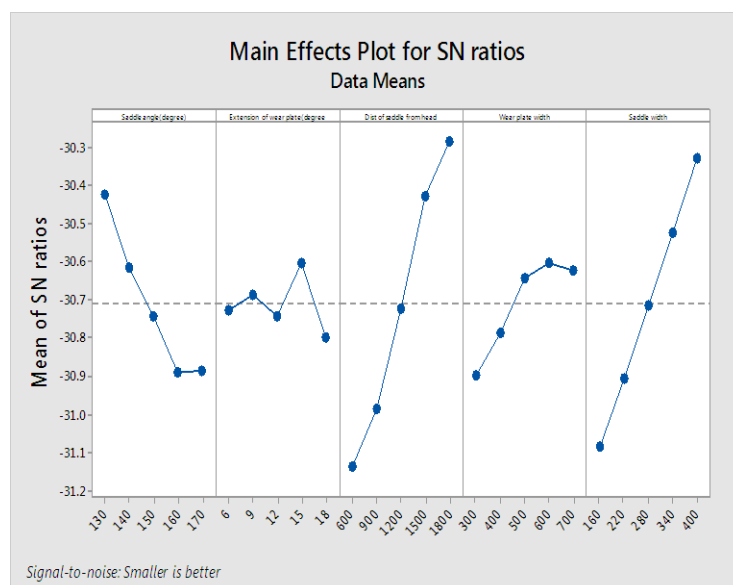


Figure 6. Main effect plots for stress 2.

Table 5. ANOVA for stress 2

Source	DF	Adj SS	Adj MS	F-Value	P-Value
Saddle angle(degree)	4	0.7803	0.19508	6.24	0.052
Extension of wear plate(degree)	4	0.1040	0.02600	0.83	0.569
Dist of saddle from head (mm)	4	2.6053	0.65132	20.83	0.006
Wear plate width(mm)	4	0.3235	0.08088	2.59	0.190
Saddle width (mm)	4	1.7981	0.44951	14.38	0.012

V. CONCLUSIONS

The Taguchi method can be effectively used along with finite element method to investigate the stress distribution in the pressure vessel. The regression equations of both the responses suggest that the wear plate extension is most significant factor and the wrap angle has moderate effect on the stress contribution. Further one can use these models for selection of various design parameters to minimize the stress in the pressure vessel.

REFERENCES

- [1].G.E.O.Widera, Z.F.Sang, R.Natarajan, "On the Design of Horizontal Pressure Vessels", Journal of Pressure Vessel Technology, ASME-1998.
- [2].Ong, "Parametric Study of peak circumferential stress at the saddle support", International Journal of Pressure Vessel and Piping, 48, pp.183-207, 1991.
- [3]. ASME SECTIONVIII DIV I, EDITION 2010.
- [4].Montgomery, D.C. "Design and Analysis of Experiments", 5th ed.John Wiley & sons Inc., 2001.
- [5].Tooth A.S.,Chan,G.C.M. and Spence,and Nash,d.h. "Horizontal Saddle Supported Storage Vessels: A Parametric Study of Plastic Loads. In: Pressure Equipment Technology: theory and Practice". Professional Engineering Publishing Ltd.,London and Bury St. Edmonds,Uk, 2003 ISBN 978-1-86058-401-5
- [6]. Nash D H,Spence J, "Parametric plastic loads and their validation for horizontal saddle supported storage vessels". In: International conference on Design, Inspection, Maintenance and operation of cylindrical steel tanks and pipelines, 2003,10-08-2003-10-11, Kralupy, Czech Republic.
- [7]. L.yang,C.Weinberger and Y.T.Shah, "Finite Element Analysis on horizontal vessels with saddle supports".Journal ofcomputers & structurds, Elsevier Science Ltd ,52,pp.387-395,1994.
- [8].K.Magnucki,P.Stasiewicz,W.Szyc, "Flexible saddle support of a horizontal cylindrical Pressure vessel", International Journal of Pressure Vessel and Piping, 80, pp205-201, 2003.
- [9]. N.El-Abbasi,S.A.Meguid,A.Czekanski, "Three dimensional finite element analysis of saddle supported pressure vessels". International Journal of Mechanical Sciences, 43, pp1229-1242, 2001.
- [10]. Nash,Spence, "On the plastic collapse of horizontal saddle supported storage vessels", Proceedings ICPVT-10, July7-10, 2003, Austria.
- [11]. L.P.Zick, "Stresses in large horizontal cylindrical pressure vessels on two saddle support ". Weld J Res Suppl, 30, pp 435-445, 1951.
- [12].L.S.Ong, J.S.T. Cheung, H.W.Ng, A.S.Tooth, "Parametric equations for maximum stress in cylindrical vessel subjected to thermal expansion loading". International Journal of Pressure Vessel and Piping, 75, pp255-262, 1998.
- [13]. Shafique M.A.Khan, "Stress distributions in a horizontal pressure vessel and the saddle supports", International Journal of pressure vessel and piping, 87, pp239-244, 2010.